

# Exit Luminaire Style Variant LED 29011 LED CG-S









29011 LED  
with cover PL

## Technical data

### 29011 LED CG-S

<b>Viewing distance</b>		<b>32 m</b>
Luminous flux DC-operation	100 %	79 lm
	65 %	55 lm
Enclosure material		Polycarbonate
Weight incl. cover		1.1 kg
Enclosure colour		Grey
Type of mounting		Wall or ceiling mounting
Dimensions (mm) (L x H x D)		342 x 200 x 68
Connection terminals		2 x 2 x 2.5 mm <sup>2</sup>
Voltage range		230 V 50/60 Hz, 220 V DC +25/-20 %
Current consumption	100 %	28 mA
(220 V battery)	65 %	20 mA
Power consumption	100 %	10.1 VA
	65 %	7.5 VA
Permissible temperature range		-10 °C ... +40 °C
Lamp		4 x 1 W LED
Insulation class		II
Degree of protection		IP 41



## Ordering details

Type	Scope of supply	Order No.
29011 LED CG-S	Luminaire enclosure without cover, with CEWA GUARD-monitoring and 20 digit address switch	4 0071 350 551
Cover PL acc. DIN 4844	Cover with silk screened legend 	4 0071 349 320
Cover PR acc. DIN 4844	Cover with silk screened legend 	4 0071 349 321
Cover PU acc. DIN 4844	Cover with silk screened legend 	4 0071 349 323
Cover PL	Cover with silk screened legend 	4 0071 348 011
Cover PR	Cover with silk screened legend 	4 0071 348 012
Cover PU	Cover with silk screened legend 	4 0071 348 013

## Accessories

Type	Scope of supply	Order No.
Wire guard		4 0071 348 370
IP 54 option	IP 54 option	4 0071 350 420

Dimensions (mm)




# Exit Luminaire Style Variant LED 29021 LED CG-S




29021 LED  
with cover PU


Dimensions (mm)

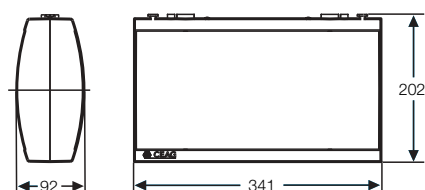


29021

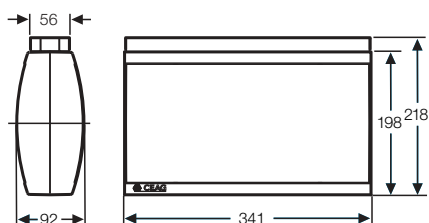

29021 with ceiling mounting

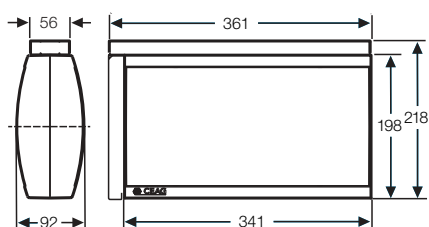

29021 with wall bracket



## Technical data

### 29021 LED CG-S

<b>Viewing distance</b>		<b>32 m</b>
Luminous flux DC-operation	100 %	147 lm
	65 %	104 lm
Enclosure material		Polycarbonate
Weight incl. cover		1.2 kg
Enclosure colour		Grey
Type of mounting		Ceiling, pendulum, chain or wall bracket mounting
Dimensions (mm) (L x H x D)		341 x 202 x 92
Connection terminals		2 x 2 x 2.5 mm <sup>2</sup>
Voltage range		230 V 50/60 Hz, 220 V DC +25/-20 %
Current consumption	100 %	48 mA
(220 V battery)	65 %	34 mA
Power consumption	100 %	16.1 VA
	65 %	11.4 VA
Permissible temperature range		-10 °C ... +40 °C
Lamp		8 x 1 W LED
Insulation class		II
Degree of protection		IP 41

## Ordering details

Type	Scope of supply	Order No.
<b>29021 LED CG-S</b>	Luminaire enclosure without cover, with CEWA GUARD-monitoring and 20 digit address switch	4 0071 350 550
<b>Cover PL acc. DIN 4844</b>	Cover with silk screened legend	4 0071 349 320
<b>Cover PR acc. DIN 4844</b>	Cover with silk screened legend	4 0071 349 321
<b>Cover PU acc. DIN 4844</b>	Cover with silk screened legend	4 0071 349 323
<b>Cover PL</b>	Cover with silk screened legend	4 0071 348 011
<b>Cover PR</b>	Cover with silk screened legend	4 0071 348 012
<b>Cover PU</b>	Cover with silk screened legend	4 0071 348 013
<b>Dummy cover</b>	Dummy cover	4 0071 345 987

## Accessories

Type	Scope of supply	Order No.
<b>Ceiling mounting</b>		4 0071 350 432
<b>Pendulum set 0.5 m</b>		4 0071 350 394
<b>Wall bracket</b>		4 0071 350 418
<b>Chain fastening</b>		4 0071 350 432