



AUTOCLEAR® CheckGate® 8000C and 9000C

Compact Column Weapons Portal

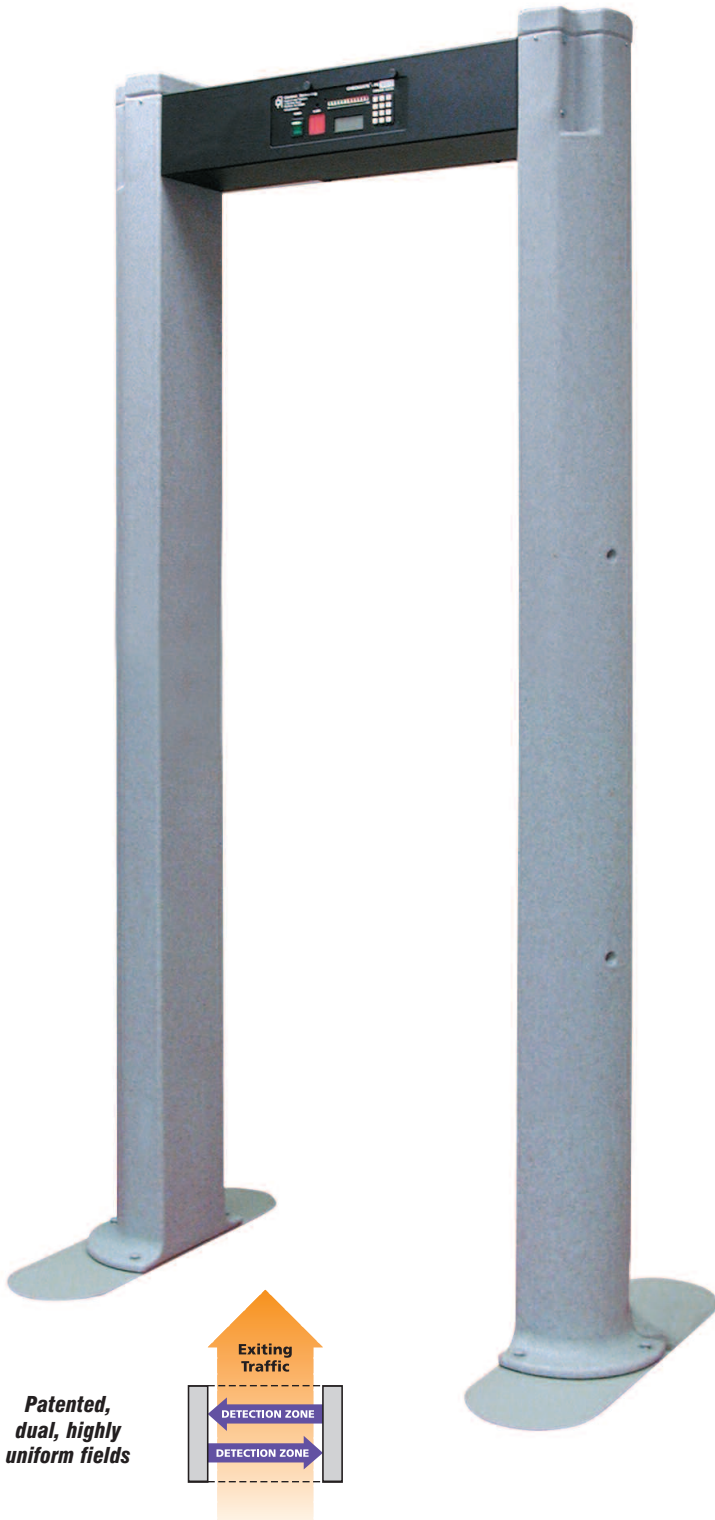

Patented,
dual, highly
uniform fields

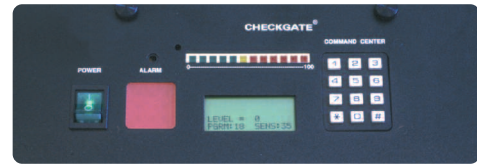

CheckGate®: Easy to operate, view and maintain, with 64-character backlit LCD, large alarm LEDs and adjustable tones.

Features and Benefits

→ Clever discrimination

The 9000C automatically double screens each person, saving valuable time and manpower with its unique multi-field transmitter and receiver pairs on **both** portal sides.

→ Reliable and robust

No melamine, brittle plastic, bulbs, or entry sensors to replace or repair. Environmentally robust and friendly.

→ Lightest weight, portable column design

Rounded columns allow for greater overall visibility. Very lightweight, portable and robust in architectural granite/marble composite. Lightest and toughest portal anywhere.

→ Lowest false alarm rates

Fastest checkpoint processing, even at the highest threat levels.

→ Advanced signal processing

Uniquely filters out RFI/EMI “noise” from surrounding electronic monitors, devices and systems.

→ Easy set-up and care

Setting detection levels, volume, tone and features is simple, yet secure.

→ Fast, automatic calibration

Nulls out metal around portal sides.

→ Model 8000C version

The 8000C version detects all metal threats, with advanced signal processing and uniform detection top to bottom.

→ Quality compliant

CE compliant, medically safe, lowest emissions/power, FAA approved. American design and manufacture. Highest ISO 9001 certified.

Ultimate Portability, & Performance

Events • Schools • Secret Service • Military
Police • Architectural • Hotels • Banks • Rentals • Media

70 years leading innovation in checkpoint detection & support

AUTOCLEAR®

autoclearus.com

Scintrex® • CheckGate® • Dynavision® • Control Screening® • Federal Labs®
U.S. Canada France UK UAE Japan Latin America Singapore Spain

CheckGate® 8000C/9000C technical specifications

AUTOCLEAR CheckGate® 9000C provides extremely low false alarm rates and offers the highest throughput traffic flow. Unique patented multiple paired antenna coils marginalize false alarms on personal items, providing maximum detection and maximum reliability. The lowest false alarm and highest threat object detection rates are assured in the busiest and toughest security environments. CheckGate® portals are also available in multizone configurations. Ask for details.

CheckGate® 8000C has been engineered to be cost effective and as attractive, durable and reliable as the Model 9000C, with the same strong noise immunity and ease of use.

Standard Features of 9000C

- DSP circuitry eliminates spikes, noise, and two-way radio interference.
- No Sensors are required—detection circuitry is continuously active.
- LCD display indicates settings, diagnostic functions and operational menus. Large, bright LED indicators for power and alarm status.
- Diagnostics are built in and circuits are constantly monitored for faults.
- 100 standard programs, ferrous and nonferrous metal detection.
- Sensitivity range settings are selectable from 0 to 99 for accurate target detection.
- Cable-free installation with four selectable ring-tones. Remote alarm relay and data output connector.
- One year warranty on all parts and labor—extended warranty available. Lifetime no chip or crack warranty on portal side materials.

Unique Performance Qualities of 9000C

- Unique dual coil system and powerful software provide multi-field detection throughout, yielding by far the lowest false alarm rate, for the widest range of targets.
- Left-to-right, right-to-left, top-to-bottom, and bottom-to-top positions detect any target, eliminating “strong” and “weak” sides. No comparable model comes close.
- Custom programs are configured via built-in menu prompts, allowing further enhancement for unique targets or environments.
- Magnetic field lower by 50%, minimizing moving metal interference at the front and exit.
- The portal self adjusts to withstand environmental interference from large static metal objects and heavy local RFI. A dual channel bargraph meter makes it easy to optimize performance in busy locations.
- The portal can be optimized to the local floor construction. Detection at ankle level or below is easily adjustable (using less than two parameters).

Performance Standards

Meets and exceeds NILECJ standard 0601.00 level 1-5, ICAO, FCC and F.A.A. Airport Security Regulations.

Electronics

Microprocessor computer controlled circuitry with 12 digit keypad entry control, LCD display, LED bargraph meter & audio/visual alarm.

Portal

Architectural, seamless thermoplastic houses multi-field coils. Standard composite: Blue-grey granite. Select 9000C (Compact, Column) or 8000C (Compact, Column)

Power

Industrial grade power supply 90-265 VAC (<1Amp), 50/60 Hz +/- 3 Hz

Environmental Conditions

Temperature: -10°C to 55°C
Humidity: 0-98%, non-condensing

Dimensions & Weight

Overall Loop Assembly	47"W x 90"H x 9"D (119cm x 229cm x 22cm)
Passageway Clearance	30"W x 81"H (76cm x 206cm)
Net Weight	50 lbs. (23 kg)
Optional Mounting Plates	10 lbs. each (optional)

Options

- Remote Command Center
- 24" and Custom Widths
- Remote Annunciator Panel
- Formica Color, Construction
- Floor Anchor Kit
- Wheels or No Tools Hardware
- Compact, Column Model 9000C
- Battery Backup
- Matching Key Side Table
14.7"W x 23.3"D x 38"H
(37cm W x 59cm D x 96cm H)
- Person Counter, Sensor
- Weatherization
- Built-in Power
Conditioner
- CE Marking



New, matching Key Table and award winning HandWand® available!

www.autoclearus.com

Technology Labs & Headquarters Plant

2 Gardner Road
Fairfield, NJ 07004-2206 USA
Tel: + 1 (973) 276-6161
Fax: + 1 (973) 276-6162
info@autoclearus.com

Central EU

eu@autoclearus.com
Tel: + 33 2 38 61 97 00
Fax: + 33 2 38 61 97 01

Southern EU

seu@autoclearus.com

Northern EU

neu@autoclearus.com

Canada & Scintrex

info@scintrextrace.com
300 Parkdale Ave., Ottawa
Ontario, Canada K1Y 1G2
Tel: + 1 (613) 224-1061
Fax: + 1 (613) 224-2603

Asia Southeast & North
sasia@autoclearus.com
nasia@autoclearus.com

Latin America

latina@autoclearus.com

Middle East

ME@autoclearus.com
Dubai, UAE
Tel: + 971 6 557 4505
Fax: + 971 6 557 4507

Western U.S.

nw@autoclearus.com
sw@autoclearus.com

Distributor:

ISO 9001-2000 Certified
U.S. Pat. 5,397,986

www.autoclearus.com
www.tracedetection.com www.fed-labs.com

70 years leading innovation in checkpoint detection & support

AUTOCLEAR®
autoclearus.com

Scintrex® • CheckGate® • Dynavision® • Control Screening® • Federal Labs®
U.S. Canada France UK UAE Japan Latin America Singapore Spain